

# LSV2-08-2 NOS

2-Way,2-Position,Normally open,  
Spool-type Solenoid Valve

## DESCRIPTION

A solenoid operated, 2-way, 2-position, normally open, spool-type cartridge valve.


## OPERATION

When de-energized, the valve allows flow in both directions. When energized, the cartridge's spool shifts to block flow in both directions.

### Operation of Manual Override Option


To override, push button in, twist counterclockwise 180°and release. In this position, valve will remain close in a detented condition. To return to normal operation, push button in, twist clockwise 180°and release. Override will be detented in this position.

## SYMBOL




## SPECIFICATIONS


Operating Pressure	207bar
Flow	See PRESSURE DROP VS.FLOW graph.
Internal Leakage	82 cc/min max. at 207bar
Temperature	-40°F to +212°F(-40°C to +100°C)
Coil Duty Rating	Continuous from 85% to 115% of nominal voltage
Filtration	See page N-1
Fluids	Mineral-based fluids with viscosities of 7.4 to 420 cSt.
Cavity	08-2,See page M-1
Housing Material	6061-T6 aluminum alloy rated to 207bar, Steel & Ductile iron rated to 350bar

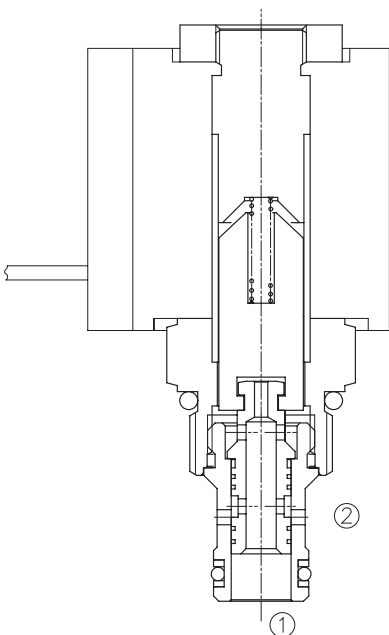

## PRESSURE DROP VS.FLOW

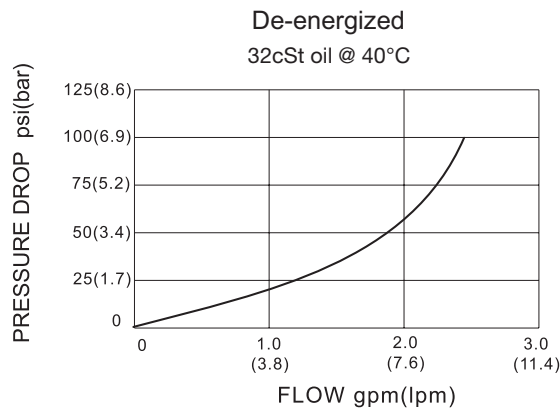

**TO ORDER**



- 1 Function**  
LSV2=Solenoid Valve

---

- 2 Size**  
08=08 Size

---

- 3 Flow Path**  
2=2-Way

---

- 4 Style**  
NO=Normally Open

---

- 5 Type**  
S=Spool

---

- 6 Manual Override Options**  
Omit=None  
M=Manual Override

- 7 Coil Voltage**  
1=12 VDC  
2=24 VDC  
3=110 VAC  
4=220 VAC  
5=10 VDC  
7=48 VDC  
8=24 VAC

---

- 8 Coil Connector Type**  
D= Double Lead  
S= Single Lead  
H= Hirschmann  
ER= Deutsch Connector(Water-proof Coil)  
IP69K  
E= Single Stud  
B= Double Spade

- 9 Port Size**  
Omit=None  
4T=SAE 4  
6T=SAE 6  
2G=G 1/4  
3G=G 3/8

---

- ※ See page K-1 for detail of housing
- ※ Other port sizes are available

**INSTALLATION DIMENSIONS**

Coil Must Be Installed With Letter Up

Unit=Millimeters

